



## Ecoline Mini

8 766 365 189

15 × 1,8 W, 1451 lm, 4000 K neutral white, DALI, asymmetrical 30°

L<sub>1</sub> = 1550 mm, L<sub>2</sub> = 1513 mm

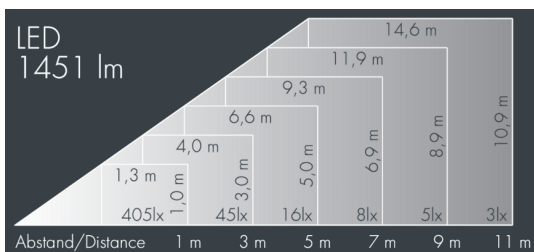

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, polycarbonate cover, with partial frosting for uniform light diffraction, silicon gasket, mounting flanges: 2 elongated holes Ø 6.5, spacing L<sub>2</sub>, tilt range: 220°, cable gland:

M16, with 1 m cable gland ÖLFLEX Robust 210 5G1, connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral, dimmable driver (DALI), CRI > 80, max 2 SDCM, service life L<sub>90</sub>/B<sub>10</sub> > 50.000 h, luminous flux: 1451 lm, wattage: 26 W, delivered lumens 56 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,059 m<sup>2</sup>, dimensions (L×H×W): 1550 × 43 × 40 mm, weight 3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK10

## Specification

|                            |   |                             |                     |
|----------------------------|---|-----------------------------|---------------------|
| Wattage                    | 26 W  | Housing colour              | white RAL 9002      |
| Delivered lumens           | 56 lm/W                                     | Power supply cable          | Ø 5 – 9 mm          |
| Light source               | LED 4000 K                                  | Protection type             | IP65                |
| Color Rendering Index      | CRI > 80                                    | Protection class            | I                   |
| Colour tolerance           | max 2 SDCM                                  | Impact resistance           | IK10                |
| Lifetime ta 25° C          | L <sub>90</sub> /B <sub>10</sub> > 50.000 h | Windage area                | 0,059m <sup>2</sup> |
| Control gear               | DALI  | Dimensions                  | 1550 × 43 × 40 mm   |
| Input voltage AC           | 220 – 240 V                                 | Weight                      | 3,00 kg             |
| Input voltage DC           | 195 – 240 V                                 | Max. ambient temperature ta | 50°                 |
| Voltage protection         | 2 kV L/N   4 kV L/PE                        |                             |                     |
| Luminaires per B16A / C16A | 50 / 85                                     |                             |                     |