
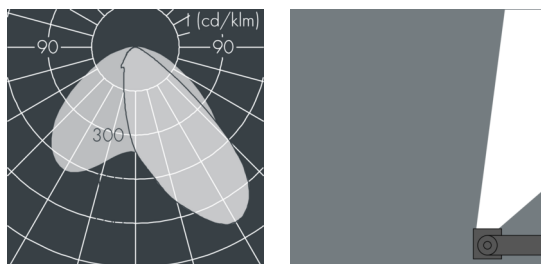


Ecoline Mini

8 766 955 089

3 × 1,8 W, 291 lm, 4000 K neutral white, asymmetrical 30°

L₁ = 444 mm, L₂ = 407 mm

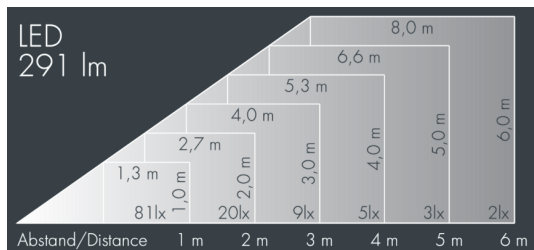

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, polycarbonate cover, with partial frosting for uniform light diffraction, silicon gasket, mounting flanges: 2 elongated holes Ø 6.5, spacing L₂, tilt range: 220°, cable gland: M16 with 1 m cable Ho5RN-F3G1, connecting terminal: 3 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L₉₀/B₁₀ > 50.000 h, luminous flux: 291 lm, wattage: 5 W, delivered lumens 58 lm/W, protection type IP65, protection class I, impact resistance IK10, dimensions (L×H×W): 444 × 43 × 40 mm, weight 1.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK10

Specification

| | | | |
|-----------------------|---|--------------------|------------------|
| Wattage | 5 W | Housing colour | silver grey |
| Delivered lumens | 58 lm/W | Power supply cable | Ø 5 – 9 mm |
| Light source | LED 4000 K | Protection type | IP65 |
| Color Rendering Index | CRI > 80 | Protection class | I |
| Colour tolerance | max 2 SDCM | Impact resistance | IK10 |
| Lifetime ta 25° C | L ₉₀ /B ₁₀ > 50.000 h | Dimensions | 444 × 43 × 40 mm |
| Control gear | on / off | Weight | 1,10 kg |
| Input voltage AC | 220 – 240 V | | |
| Input voltage DC | 195 – 250 V | | |
| Voltage protection | 1 kV L/N 1 kV L/PE | | |