






## Monospot Gobo

8 905 246 049

55 W, 1445 lm, 3000 K warm white,  
85 mm focal length 22°

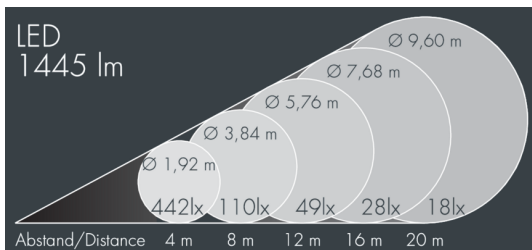

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles  $\varnothing$  60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes  $\varnothing$  9 mm, spacing 95 mm, 1 centre hole  $\varnothing$  13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 3 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (AC/DC), CRI > 80, Beam angle (FWHM): 22°, luminous flux: 1445 lm, wattage: 55 W, delivered lumens 26 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,076 m<sup>2</sup>, dimensions:  $\varnothing$  215 mm, width 390 mm, weight 8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

## Specification

|                            |                      |                             |                                    |
|----------------------------|----------------------|-----------------------------|------------------------------------|
| Wattage                    | 55 W                 | Beam angle (FWHM)           | 22°                                |
| Delivered lumens           | 26 lm/W              | Housing colour              | black RAL 7021                     |
| Light source               | LED 3000 K           | Power supply cable          | $\varnothing$ 6 – 13 mm            |
| Color Rendering Index      | CRI > 80             | Protection type             | IP65                               |
| Control gear               | on / off             | Protection class            | I                                  |
| Input voltage AC           | 220 – 240 V          | Impact resistance           | IK08                               |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Windage area                | 0,076m <sup>2</sup>                |
| Luminaires per B16A / C16A | 23 / 39              | Dimensions                  | $\varnothing$ 215 mm, width 390 mm |
|                            |                      | Weight                      | 8,00 kg                            |
|                            |                      | Max. ambient temperature ta | 35°                                |