


8 902 256 229

Abstand/Distance	3 m	6 m	9 m	12 m	15 m	18 m
Beam Diameter	0,5 m	1,0 m	1,4 m	1,9 m	2,4 m	2,9 m
Beam Diameter (mm)	500 mm	1000 mm	1400 mm	1900 mm	2400 mm	2900 mm
Beam Diameter (ft)	1,64 ft	3,28 ft	4,59 ft	6,23 ft	7,87 ft	9,51 ft
Beam Diameter (in)	19,69 in	39,37 in	55,12 in	74,80 in	94,49 in	114,17 in
Beam Diameter (m)	0,5 m	1,0 m	1,4 m	1,9 m	2,4 m	2,9 m
Beam Diameter (mm)	500 mm	1000 mm	1400 mm	1900 mm	2400 mm	2900 mm
Beam Diameter (ft)	1,64 ft	3,28 ft	4,59 ft	6,23 ft	7,87 ft	9,51 ft
Beam Diameter (in)	19,69 in	39,37 in	55,12 in	74,80 in	94,49 in	114,17 in
Beam Diameter (m)	0,5 m	1,0 m	1,4 m	1,9 m	2,4 m	2,9 m
Beam Diameter (mm)	500 mm	1000 mm	1400 mm	1900 mm	2400 mm	2900 mm
Beam Diameter (ft)	1,64 ft	3,28 ft	4,59 ft	6,23 ft	7,87 ft	9,51 ft
Beam Diameter (in)	19,69 in	39,37 in	55,12 in	74,80 in	94,49 in	114,17 in

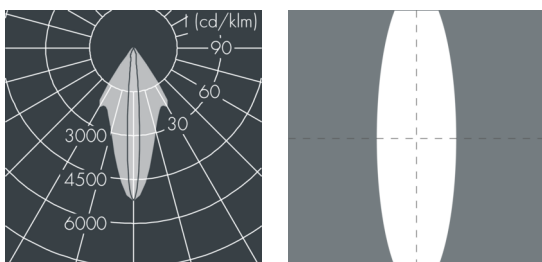

Specification

housing made of corrosion-resistant die-cast aluminum ALSi1 2, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey , all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 2 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M16, connecting terminal: 5 pole, highly efficient faceted rotationally symmetrical reflector, integral driver (dimmissible 1-10V), CRI > 80, max 3 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 35° / 8°, luminous flux: 1202 lm, wattage: 15 W, delivered lumens 80 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,031 m², dimensions: Ø 133 mm, width 153 mm, weight 2.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 08

Wattage	15 W	Beam angle (FWHM)	35° / 8°
Delivered lumens	80 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Power supply cable	Ø 5 – 9 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	max 3 SDCM	Protection class	I
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK08
Control gear	1-10V	Windage area	0,031 m²
Input voltage AC	110 – 240 V	Dimensions	Ø 133 mm, width 153 mm
Input voltage DC	195 – 240 V	Weight	2,10 kg
Voltage protection	2 kV L/N 4 kV L/PE	Max. ambient temperature ta	45°
Luminaires per B16A / C16A	50 / 85		