
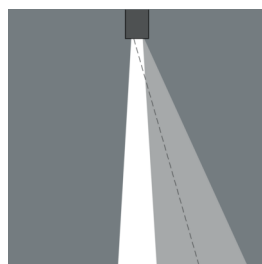
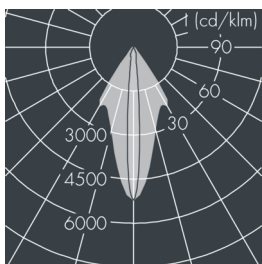


## Nanocube

8 308 255 029

5 W, 365 lm, 4000 K neutral white,  
linear beam spread  $34^\circ / 7^\circ$

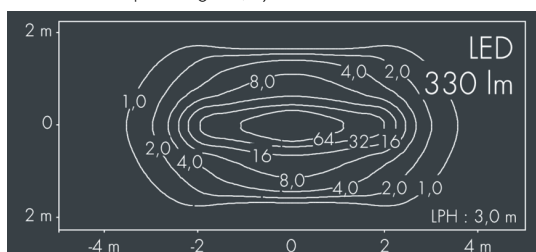

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, housing locked with a grub screw, ceiling mounting: 2 drilled holes  $\varnothing 4.5$  mm, spacing 35 mm, cable gland:

cable entry for recessed cable  $\varnothing 7-10$  mm, connecting terminal: 3 pole, highly efficient aluminum reflector for linear beam spread, integral driver (AC/DC), CRI > 80, max 3 SDCM, service life  $L_{90}/B_{10} > 50.000$  h,

Beam angle (FWHM):  $34^\circ / 7^\circ$ , luminous flux: 365 lm, wattage: 5 W, delivered lumens 73 lm/W, protection type IP65, protection class I, impact resistance IK07, windage area  $0,005$  m<sup>2</sup>, dimensions (L×H×W): 66 × 87 × 66 mm, weight 0.57 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP65 IK07

## Specification

Wattage	5 W	Beam angle (FWHM)	$34^\circ / 7^\circ$
Delivered lumens	73 lm/W	Housing colour	silver grey
Light source	LED 4000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 3 SDCM	Impact resistance	IK07
Lifetime at $25^\circ$ C	$L_{90}/B_{10} > 50.000$ h	Windage area	$0,005$ m <sup>2</sup>
Control gear	on / off	Dimensions	66 × 87 × 66 mm
Input voltage AC	100 – 240 V	Weight	0,57 kg
Voltage protection	1 kV L/N   1 kV L/PE	Max. ambient temperature $t_a$	$45^\circ$
Luminaires per B16A / C16A	154 / 154		