
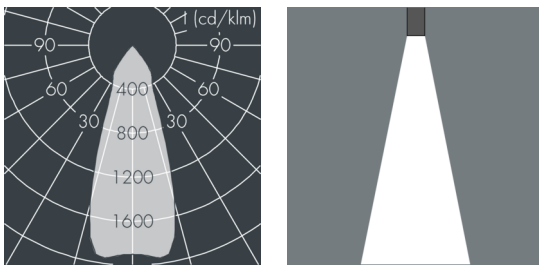


## Nanocube

8 308 246 049

5 W, 330 lm, 3000 K warm white,  
medium wide beam 37°

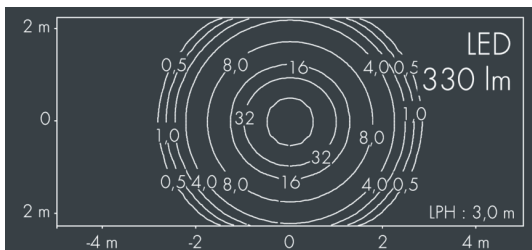

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, housing locked with a grub screw, ceiling mounting: 2 drilled holes  $\varnothing$  4.5 mm, spacing 35 mm, cable gland:

cable entry for recessed cable  $\varnothing$  7-10 mm, connecting terminal: 3 pole, highly efficient faceted rotationally symmetrical reflector, integral driver (AC/DC), CRI > 80, max 3 SDCM, service life  $L_{90}/B_{10}$  > 50.000 h, Beam angle (FWHM): 37°, luminous flux: 330 lm, wattage: 5 W, delivered lumens 61 lm/W, protection type IP65, protection class I, impact resistance IK07, windage area 0,005 m<sup>2</sup>, dimensions (L×H×W): 66 × 87 × 66 mm, weight 0.57 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK07

## Specification

|                            |                            |                             |                     |
|----------------------------|----------------------------|-----------------------------|---------------------|
| Wattage                    | 5 W                        | Beam angle (FWHM)           | 37°                 |
| Delivered lumens           | 61 lm/W                    | Housing colour              | black RAL 7021      |
| Light source               | LED 3000 K                 | Protection type             | IP65                |
| Color Rendering Index      | CRI > 80                   | Protection class            | I                   |
| Colour tolerance           | max 3 SDCM                 | Impact resistance           | IK07                |
| Lifetime ta 25° C          | $L_{90}/B_{10}$ > 50.000 h | Windage area                | 0,005m <sup>2</sup> |
| Control gear               | on / off                   | Dimensions                  | 66 × 87 × 66 mm     |
| Input voltage AC           | 100 – 240 V                | Weight                      | 0,57 kg             |
| Voltage protection         | 1 kV L/N   1 kV L/PE       | Max. ambient temperature ta | 45°                 |
| Luminaires per B16A / C16A | 154 / 154                  |                             |                     |