



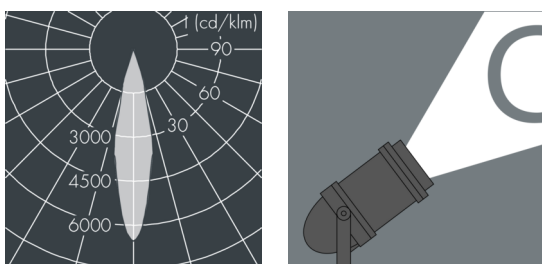

Nightspot B Gobo Projector

8 987 046 659

55 W, 1 066 lm, 3 000 K warm white, DALI,
63 mm focal length 29°

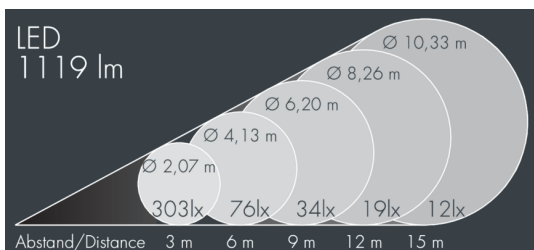

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2 700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 2 drilled holes \varnothing 9 mm, spacing 70 mm, 1 centre hole \varnothing 22 mm, tilt range: 105°, cable gland: M20, connecting terminal: 5 pole, focusable projection lens for precise light control and sharp-edged image projections, integral, dimmable driver (DALI), CRI > 80, service life L70/B > 50.000 h, Beam angle (FWHM): 29°, luminous flux: 1 066 lm, wattage: 55 W, delivered lumens 19 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,085 m², dimensions: \varnothing 240 mm, width 425 mm, weight 8.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

Specification

| | | | |
|----------------------------|----------------------|-----------------------------|------------------------------------|
| Wattage | 55 W | Beam angle (FWHM) | 29° |
| Delivered lumens | 19 lm/W | Housing colour | black RAL 7021 |
| Light source | LED 3 000 K | Power supply cable | \varnothing 8 – 15 mm |
| Color Rendering Index | CRI > 80 | Protection type | IP67 |
| Lifetime ta 25° C | L70/B > 50.000 h | Protection class | II |
| Control gear | DALI | Impact resistance | IK08 |
| Input voltage AC | 220 – 240 V | Windage area | 0,085m ² |
| Input voltage DC | 220 – 240 V | Dimensions | \varnothing 240 mm, width 425 mm |
| Voltage protection | 2 kV L/N 4 kV L/PE | Weight | 8,10 kg |
| Luminaires per B16A / C16A | 23 / 39 | Max. ambient temperature ta | 35° |