



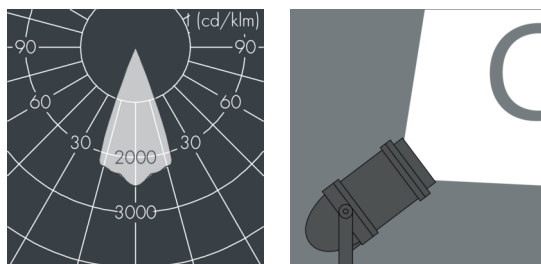

## Nightspot B Gobo Projector

8 987 246 669

55 W, 1483 lm, 3000 K warm white, DALI,  
45 mm focal length 41°

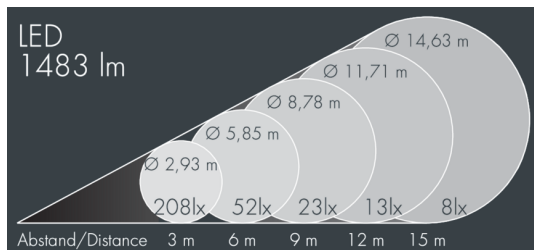

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, for installation on poles Ø 60-100mm, adjustable aluminum mounting base, powder coated: 2 drilled holes Ø 9mm, tilt range: 80°, cable gland: M20, connecting terminal: 5 pole, tilt range: 180°, focusable projection lens for precise light control and sharp-edged image projections, integral, dimmable driver (DALI), CRI > 80, Beam angle (FWHM): 41°, luminous flux: 1483 lm, wattage: 55 W, delivered lumens 27 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,085 m<sup>2</sup>, dimensions: Ø 240 mm, width 425 mm, weight 7.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

## Specification

Wattage	55 W	Beam angle (FWHM)	41°
Delivered lumens	27 lm/W	Housing colour	black RAL 7021
Light source	LED 3000 K	Power supply cable	Ø 6 – 10 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Control gear	DALI	Protection class	II
Input voltage AC	220 – 240 V	Impact resistance	IK08
Input voltage DC	220 – 240 V	Windage area	0,085m <sup>2</sup>
Voltage protection	2 kV L/N   4 kV L/PE	Dimensions	Ø 240 mm, width 425 mm
Luminaires per B16A / C16A	23 / 39	Weight	7,90 kg
		Max. ambient temperature ta	35°