




Nightspot A2

8 983 246 579

28 W, 1974 lm, 3000 K warm white,
linear, rotatable $17^\circ / 40^\circ$

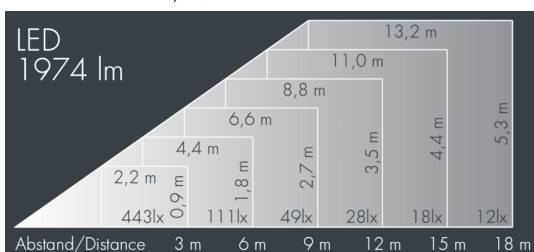

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, luminaire with ribbed glass spreader lens (internally fitted for linear beam distribution, continuously adjustable through 360°), silicon gasket, closure with 4 stainless steel screws, for installation on poles $\varnothing 60-100$ mm, adjustable aluminum mounting base, powder coated: 2 drilled holes $\varnothing 9$ mm, spacing 105mm, 1 centre hole $\varnothing 22$ mm, tilt range: 100° , cable gland: M20, connecting terminal: 3 pole, highly efficient anodized aluminum reflector, with built-in secondary reflector (narrow beam/medium wide beam) for optimal visual comfort and high efficiency, for glare control and reduction of spill light, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life $L_{90/B_{10}} > 50.000$ h, Beam angle (FWHM): $17^\circ / 40^\circ$, luminous flux: 1974 lm, wattage: 28 W, delivered lumens 70 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area $0,035$ m², dimensions: $\varnothing 180$ mm, width 200 mm, weight 2.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

Specification

Wattage	28 W	Beam angle (FWHM)	$17^\circ / 40^\circ$
Delivered lumens	70 lm/W	Housing colour	black RAL 7021
Light source	LED 3000 K	Power supply cable	$\varnothing 8 - 11$ mm
Color Rendering Index	CRI > 80	Protection type	IP67
Colour tolerance	max 2 SDCM	Protection class	II
Lifetime $t_{a 25^\circ C}$	$L_{90/B_{10}} > 50.000$ h	Impact resistance	IK08
Control gear	on / off	Windage area	$0,035$ m ²
Input voltage AC	220 – 240 V	Dimensions	$\varnothing 180$ mm, width 200 mm
Input voltage DC	190 – 245 V	Weight	2,90 kg
Voltage protection	2 kV L/N 4 kV L/PE	Max. ambient temperature t_a	35°