



## Nightspot B

8 986 159 039

7 × 1,5 W, 847 lm, RGBW (4000 K) neutral white, DMX, elliptical beam spread 24° / 47°

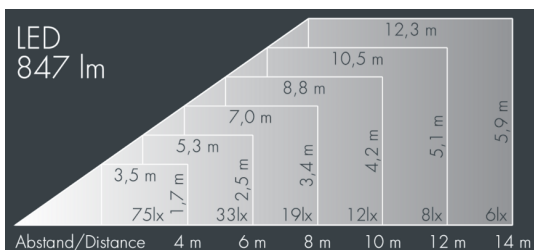

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting base adjustable: 2 drilled holes  $\varnothing$  9 mm, spacing 105 mm, 1 centre hole  $\varnothing$  22 mm, tilt range: 125°, cable gland: M20, connecting terminal: 6 pole, highly efficient optics with light conductor technology for precise lighting tasks and colour mixing within the luminaire, integral driver (AC/DC), service life L70/B20 > 50.000 h, Beam angle (FWHM): 24° / 47°, luminous flux: 847 lm, wattage: 42 W, delivered lumens 20 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,05 m<sup>2</sup>, dimensions:  $\varnothing$  240 mm, width 260 mm, weight 5.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

## Specification

|                    |                      |                             |                                    |
|--------------------|----------------------|-----------------------------|------------------------------------|
| Wattage            | 42 W                 | Beam angle (FWHM)           | 24° / 47°                          |
| Delivered lumens   | 20 lm/W              | Housing colour              | silver grey                        |
| Light source       | LED RGBW (4000 K)    | Power supply cable          | $\varnothing$ 6 – 10 mm            |
| Lifetime to 25° C  | L70/B20 > 50.000 h   | Protection type             | IP67                               |
| Control gear       | DMX                  | Protection class            | I                                  |
| Input voltage AC   | 120 – 250 V          | Impact resistance           | IK08                               |
| Input voltage DC   | 120 – 250 V          | Windage area                | 0,05m <sup>2</sup>                 |
| Voltage protection | 1 kV L/N   2 kV L/PE | Dimensions                  | $\varnothing$ 240 mm, width 260 mm |
|                    |                      | Weight                      | 5,90 kg                            |
|                    |                      | Max. ambient temperature to | 45°                                |