


8 862 341 039

Abstand/Distance	5 m	10 m	15 m	20 m	25 m	30 m
Beam Diameter	2,9 m	5,8 m	8,7 m	11,6 m	14,5 m	17,4 m
Illuminance	551 lx	138 lx	61 lx	34 lx	22 lx	15 lx

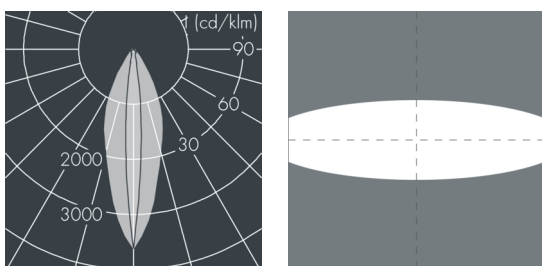

Specification text

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

Ⓢ IP65 IK08

Wattage	70 W	Beam angle (FWHM)	9°
Delivered lumens	75 lm/W	Housing colour	black RAL 7021
Control gear	on / off	Power supply cable	Ø 5 – 13 mm
		Protection type	IP65
		Protection class	I
		Impact resistance	IK08
		Windage area	0,04m²
		Dimensions	193 × 199 × 139 mm
		Weight	4,02 kg