



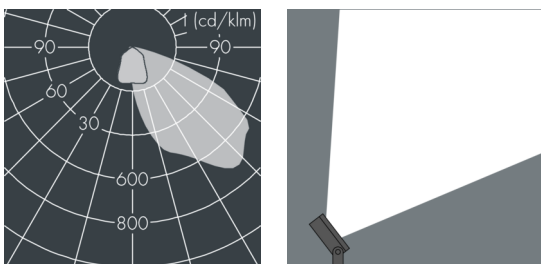

## Superlight LED 2

8 886 245 149

40 W, 3613 lm, 4000 K neutral white, DALI, asymmetrical 43°

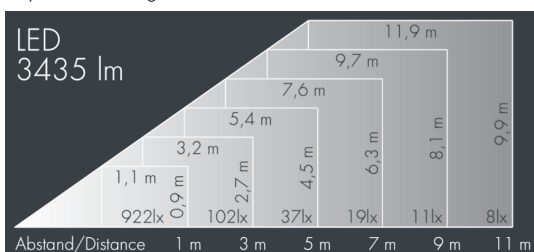

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, for installation on poles  $\varnothing$  60-100mm, adjustable aluminum mounting base, powder coated: 2 drilled holes  $\varnothing$  9mm, spacing 75mm, 1 centre hole  $\varnothing$  17mm, tilt range: 205°, cable gland: M20, connecting terminal: 5 pole, highly efficient reflector, integral driver (DALI), CRI > 85, max 2 SDCM, service life L90/B10 > 50.000 h, luminous flux: 3613 lm, wattage: 40 W, delivered lumens 90 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,047 m<sup>2</sup>, dimensions (LxHxW): 215 x 110 x 250 mm, weight 3,2 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

## Specification

Wattage	40 W	Housing colour	black RAL 7021
Delivered lumens	90 lm/W	Power supply cable	$\varnothing$ 6 – 13 mm
Light source	LED 4000 K	Protection type	IP67
Color Rendering Index	CRI > 85	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,047m <sup>2</sup>
Control gear	DALI	Dimensions	215 x 110 x 250 mm
Input voltage AC	220 – 240 V	Weight	3,20 kg
Input voltage DC	195 – 255 V		
Voltage protection	2 kV L/N   4 kV L/PE		
Luminaires per B16A / C16A	30 / 51		