



Arclux Mini

8 373 045 009

2 × 2 W, 179 lm, 4000 K neutral white,
Window reveal luminaire 6° / 180°

LED 179 lm

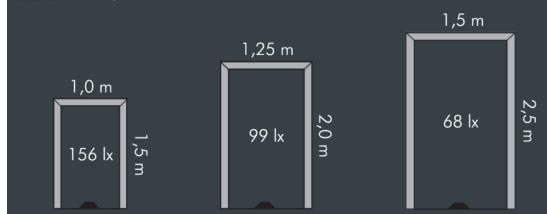

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, 4 holes Ø 6 mm, spacing 200 mm x 88 mm, cable gland: M20, connecting terminal: 3 pole, high-end optical system with specially designed reflectors achieve a uniform arch of light, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, luminous flux: 179 lm, wattage: 4 W, delivered lumens 45 lm/W, protection type IP67, protection class I, impact resistance IK08, dimensions (L×H×W): 230 × 59 × 105 mm, weight 1.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.

IP 67 IK 08

Specification

Wattage	4 W	Housing colour	black RAL 7021
Delivered lumens	45 lm/W	Power supply cable	Ø 6 – 13 mm
Light source	LED 4000 K	Protection type	IP67
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L90/B10 > 50.000 h	Dimensions	230 × 59 × 105 mm
Control gear	on / off	Weight	1,70 kg
Input voltage AC	100 – 240 V	Max. ambient temperature ta	45°
Input voltage DC	195 – 240 V		
Voltage protection	2 kV L/N 2 kV L/PE		
Luminaires per B16A / C16A	50 / 85		