
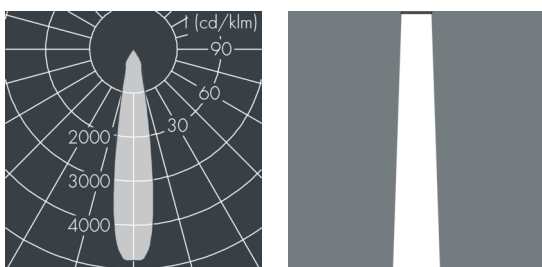


Ceiling recessed downlight

8 314 145 019

19 W, 1975 lm, 4000 K neutral white,
narrow beam 20°

Remote control gear unit essentially required, see
data sheet with accessories

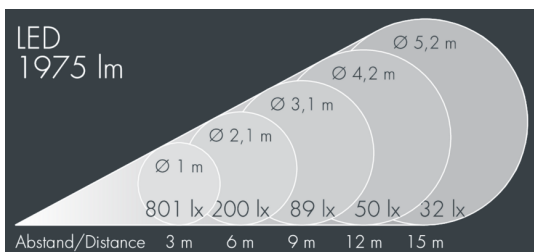

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.



[Remote control gear unit essentially required,
see data sheet with accessories](#)

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, luminaire fixed using stainless steel spring loaded clamps, clamping range in hollow ceilings 12-42 mm, aperture for installation \varnothing 125 mm, connecting terminal: 3 pole, highly efficient faceted and coated rotationally symmetrical reflector, 1 m cable, remote driver required, CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 20°, luminous flux: 1975 lm, wattage: 19 W, delivered lumens 102 lm/W, protection type IP65, protection class III, impact resistance IK08, dimensions: \varnothing 138 mm, width 95 mm, weight 1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

Specification

Wattage	19 W	Beam angle (FWHM)	20°
Delivered lumens	102 lm/W	Housing colour	black RAL 7021
Light source	LED 4000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	III
Colour tolerance	max 2 SDCM	Impact resistance	IK08
Lifetime ta 25° C	L90/B10 > 50.000 h	Dimensions	\varnothing 138 mm, width 95 mm
Control gear	on / off / DALI	Weight	1,00 kg
Input voltage AC	With remote control gear unit	Max. ambient temperature ta	40°
Input voltage DC	See accessories		
Voltage protection	2 kV L/N 4 kV L/PE		
Luminaires per B16A / C16A	50 / 85		

Technical and formal changes reserved, product photos are exemplary. As of

Willy Meyer+Sohn GmbH+Co. KG | Stemmessiepener Weg 5 | 58675 Hemer | Germany | info@meyer-lighting.com | www.meyer-lighting.com