




Ecoline Mini

8 766 355 289

15 × 1,8 W, 1451 lm, 4000 K neutral white, 1-10V, asymmetrical 30°

L₁ = 1550 mm, L₂ = 1513 mm

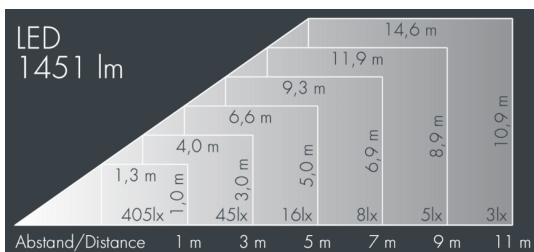

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, polycarbonate cover, with partial frosting for uniform light diffraction, silicon gasket, mounting flanges: 2 elongated holes Ø 6.5, spacing L₂, tilt range: 220°, cable gland:

M16, with 1 m cable gland ÖLFLEX Robust 210 5G1, connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral driver (dimnable 1-10V), CRI > 80, max 2 SDCM, service life L₉₀/B₁₀ > 50.000 h, luminous flux: 1451 lm, wattage: 26 W, delivered lumens 56 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,059 m², dimensions (L×H×W): 1550 × 43 × 40 mm, weight 3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK10

Specification

Wattage	26 W	Housing colour	silver grey
Delivered lumens	56 lm/W	Power supply cable	Ø 5 – 9 mm
Light source	LED 4000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK10
Lifetime ta 25° C	L ₉₀ /B ₁₀ > 50.000 h	Windage area	0,059m ²
Control gear	1-10V	Dimensions	1550 × 43 × 40 mm
Input voltage AC	220 – 240 V	Weight	3,00 kg
Input voltage DC	195 – 240 V	Max. ambient temperature ta	50°
Voltage protection	2 kV L/N 4 kV L/PE		
Luminaires per B16A / C16A	50 / 85		