




## Ecoline Mini

8 766 965 089

3 × 1,8 W, 291 lm, 4000 K neutral white, asymmetrical 30°

L<sub>1</sub> = 444 mm, L<sub>2</sub> = 407 mm

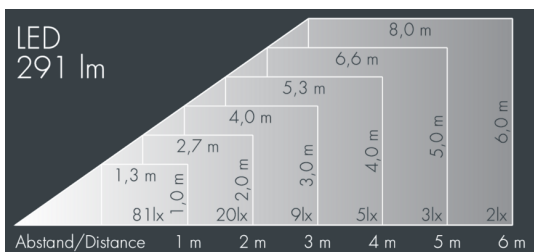

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, polycarbonate cover, with partial frosting for uniform light diffraction, silicon gasket, mounting flanges: 2 elongated holes Ø 6.5, spacing L<sub>2</sub>, tilt range: 220°, cable gland:

M16 with 1 m cable Ho5RN-F3G1, connecting terminal: 3 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral driver (AC/DC), CRI > 80, max 2 SDCM, service life L<sub>90</sub>/B<sub>10</sub> > 50.000 h, luminous flux: 291 lm, wattage: 5 W, delivered lumens 58 lm/W, protection type IP65, protection class I, impact resistance IK10, dimensions (L×H×W): 444 × 43 × 40 mm, weight 1.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK10

## Specification

Wattage	5 W	Housing colour	white RAL 9002
Delivered lumens	58 lm/W	Power supply cable	Ø 5 – 9 mm
Light source	LED 4000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK10
Lifetime ta 25° C	L <sub>90</sub> /B <sub>10</sub> > 50.000 h	Dimensions	444 × 43 × 40 mm
Control gear	on / off	Weight	1,10 kg
Input voltage AC	220 – 240 V		
Input voltage DC	195 – 250 V		
Voltage protection	1 kV L/N   1 kV L/PE		