




## Fluxa C

8 277 058 009

For

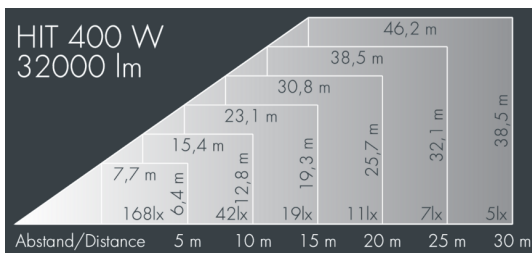

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 4 drilled holes  $\varnothing 9.5$  mm, spacing 120 mm (200 mm), 2 drilled holes  $\varnothing 16.5$  mm, spacing 300 mm, 1 centre hole  $\varnothing 21$  mm, tilt range:  $210^\circ$ , cable gland: M20, connecting terminal: 3 pole, high gloss asymmetrical aluminum reflector, integral ballast and ignitor, LPF, HPF available on request, luminous flux: 32000 lm, wattage: 400 W, delivered lumens 73 lm/W, protection type IP54, protection class I, windage area 0,28 m<sup>2</sup>, dimensions (L×H×W): 730 × 230 × 430 mm, weight 24.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP 54

## Specification

|                  |          |                    |                         |
|------------------|----------|--------------------|-------------------------|
| Wattage          | 400 W    | Housing colour     | silver grey             |
| Delivered lumens | 73 lm/W  | Power supply cable | $\varnothing 8 - 15$ mm |
| Control gear     | on / off | Protection type    | IP54                    |
|                  |          | Protection class   | I                       |
|                  |          | Windage area       | 0,28m <sup>2</sup>      |
|                  |          | Dimensions         | 730 × 230 × 430 mm      |
|                  |          | Weight             | 24,80 kg                |