



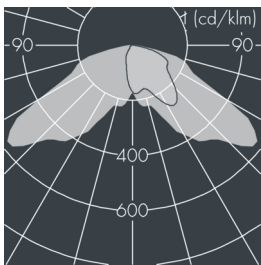

## Fluxa B

8 288 056 159

2 × 70 W, 12377 lm, 3000 K warm white, DALI, wide beam 67° / 124°

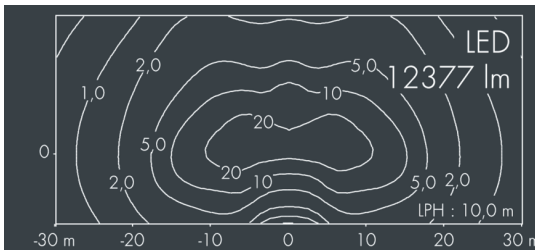

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, aluminum mounting bracket, polyester powder coated, with tilt scale: 4 drilled holes Ø 8.5mm, spacing 70mm (120mm), 2 drilled holes Ø 10mm, spacing 200mm, cable gland: M20, connecting terminal: 5 pole, highly efficient anodized rotationally symmetrical reflector with matt finish, integral, dimmable driver (DALI), max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 67° / 124°, luminous flux: 12377 lm, wattage: 140 W, delivered lumens 88 lm/W, protection type IP65, protection class I, impact resistance IK09, windage area 0,16 m<sup>2</sup>, dimensions (L×H×W): 450 × 150 × 335 mm, weight 9.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK09

## Specification

|                   |                    |                             |                    |
|-------------------|--------------------|-----------------------------|--------------------|
| Wattage           | 140 W              | Beam angle (FWHM)           | 67° / 124°         |
| Delivered lumens  | 88 lm/W            | Housing colour              | silver grey        |
| Light source      | LED 3000 K         | Power supply cable          | Ø 8 – 15 mm        |
| Colour tolerance  | max 2 SDCM         | Protection type             | IP65               |
| Lifetime ta 25° C | L90/B10 > 50.000 h | Protection class            | I                  |
| Control gear      | DALI               | Impact resistance           | IK09               |
|                   |                    | Windage area                | 0,16m <sup>2</sup> |
|                   |                    | Dimensions                  | 450 × 150 × 335 mm |
|                   |                    | Weight                      | 9,70 kg            |
|                   |                    | Max. ambient temperature ta | 40°                |