



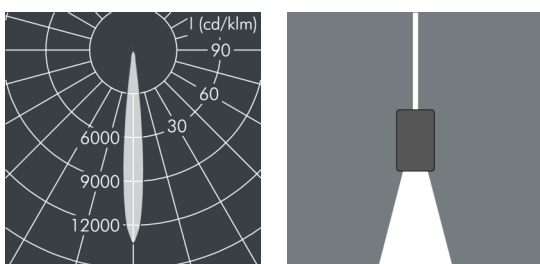

## Highrise

8 365 666 019

2 × 16 W, 2019 lm, 3000 K warm white,  
accent light up, narrow beam down up 1° / down 10°

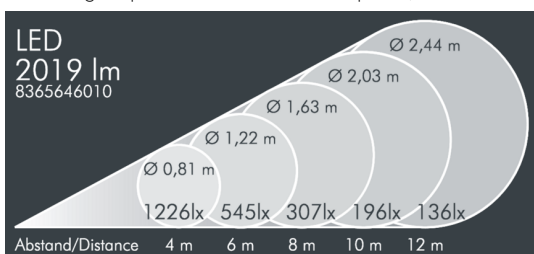

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, wall box with 2 stainless steel screws, wall box: 2 drilled holes Ø 6 mm, spacing 150 mm, cable gland: 2x Ø 7-10 mm, connecting terminal: 3 pole, highly efficient aluminum reflector, projection lens, integral driver (AC/DC), CRI > 80, max 3 SDCM, service life L80/B20 > 50.000 h, Beam angle (FWHM): up 1° / down 10°, luminous flux: 2019 lm, wattage: 32 W, delivered lumens 63 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,03 m<sup>2</sup>, dimensions (L×H×W): 153 × 199 × 118 mm, weight 2.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

## Specification

|                            |                      |                             |                    |
|----------------------------|----------------------|-----------------------------|--------------------|
| Wattage                    | 32 W                 | Beam angle (FWHM)           | up 1° / down 10°   |
| Delivered lumens           | 63 lm/W              | Housing colour              | white RAL 9002     |
| Light source               | LED 3000 K           | Protection type             | IP65               |
| Color Rendering Index      | CRI > 80             | Protection class            | I                  |
| Colour tolerance           | max 3 SDCM           | Impact resistance           | IK08               |
| Lifetime ta 25° C          | L80/B20 > 50.000 h   | Windage area                | 0,03m <sup>2</sup> |
| Control gear               | on / off             | Dimensions                  | 153 × 199 × 118 mm |
| Input voltage AC           | 220 – 240 V          | Weight                      | 2,80 kg            |
| Input voltage DC           | 220 – 240 V          | Max. ambient temperature ta | 35°                |
| Voltage protection         | 2 kV L/N   4 kV L/PE |                             |                    |
| Luminaires per B16A / C16A | 50 / 85              |                             |                    |