
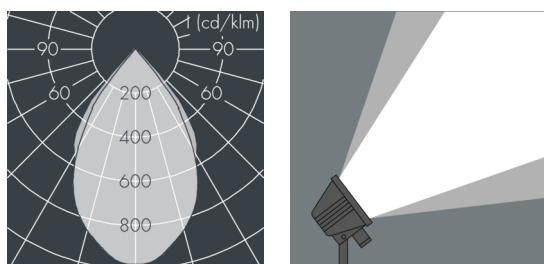


## LED-floodlights Maxi

8 541 096 059

56 W, 6065 lm, 3000 K warm white,  
wide beam 62° / 68°

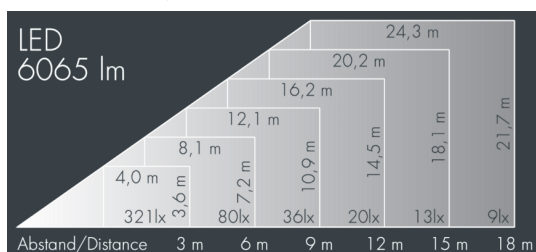

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of die-cast aluminum AlSi12, unpainted, Colour: unpainted, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, 2 stainless steel clamps, aluminum mounting bracket: 2 holes  $\varnothing$  9 mm, spacing 70 mm, 1 centre hole  $\varnothing$  10.5 mm, tilt range: 100°, cable gland: PG 11, connecting terminal: 3 pole, axially symmetrical highgloss reflector, integral control gear, CRI > 85, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 62° / 68°, luminous flux: 6065 lm, wattage: 56 W, delivered lumens 108 lm/W, protection type IP55, protection class I, impact resistance IK07, windage area 0,08 m<sup>2</sup>, dimensions (L×H×W): 310 × 160 × 240 mm, weight 3,4 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP55 IK07

## Specification

Wattage	56 W	Beam angle (FWHM)	62° / 68°
Delivered lumens	108 lm/W	Housing colour	unpainted
Light source	LED 3000 K	Protection type	IP55
Color Rendering Index	CRI > 85	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK07
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,08m <sup>2</sup>
Control gear	on / off	Dimensions	310 × 160 × 240 mm
Input voltage AC	220 – 240 V	Weight	3,40 kg
Input voltage DC	195 – 255 V		
Voltage protection	4 kV L/N   2 kV L/PE		
Luminaires per B16A / C16A	24 / 41		