
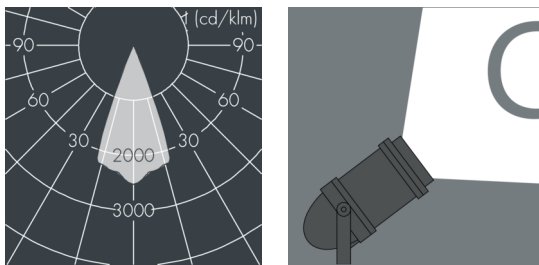


## Metaspot Gobo

8 244 044 369  
49 W, 1535 lm, 6500 K cold white, Zhaga 18,  
45 mm focal length 41°

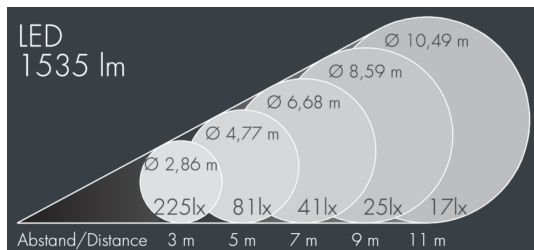

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, tool-free twist closure, mounting bracket made of coated aluminum with inclination scale : 2 drilled holes  $\varnothing$  9 mm, spacing 40 mm, 1 centre hole  $\varnothing$  14 mm, tilt range: 180°, cable gland: M20, connecting terminal: 5 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (AC/DC), CRI > 70, Beam angle (FWHM): 41°, luminous flux: 1535 lm, wattage: 49 W, delivered lumens 31 lm/W, protection type IP65, protection class I, impact resistance IK08, dimensions:  $\varnothing$  200 mm, width 423 mm, weight 6.5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

## Specification

|                       |            |                   |                                    |
|-----------------------|------------|-------------------|------------------------------------|
| Wattage               | 49 W       | Beam angle (FWHM) | 41°                                |
| Delivered lumens      | 31 lm/W    | Housing colour    | black RAL 7021                     |
| Light source          | LED 6500 K | Protection type   | IP65                               |
| Color Rendering Index | CRI > 70   | Protection class  | I                                  |
| Control gear          | Zhaga 18   | Impact resistance | IK08                               |
|                       |            | Dimensions        | $\varnothing$ 200 mm, width 423 mm |
|                       |            | Weight            | 6,50 kg                            |