
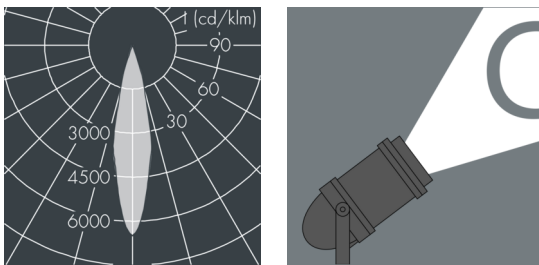


## Metaspot Gobo

8 244 264 259

49 W, 1127 lm, 6500 K cold white, DALI D4i,  
63 mm focal length 29°

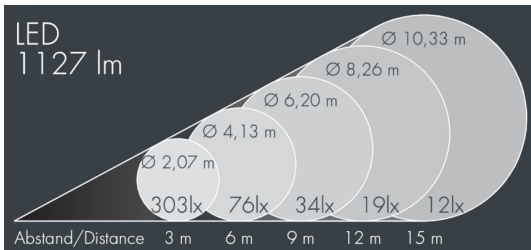

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, tool-free twist closure, for installation on poles  $\varnothing$  60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes  $\varnothing$  9 mm, spacing 95 mm, 1 centre hole  $\varnothing$  40 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (AC/DC), CRI > 70, Beam angle (FWHM): 29°, luminous flux: 1127 lm, wattage: 49 W, delivered lumens 23 lm/W, protection type IP65, protection class I, impact resistance IK08, dimensions:  $\varnothing$  200 mm, width 423 mm, weight 6.5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

## Specification

|                       |            |                   |                                    |
|-----------------------|------------|-------------------|------------------------------------|
| Wattage               | 49 W       | Beam angle (FWHM) | 29°                                |
| Delivered lumens      | 23 lm/W    | Housing colour    | white RAL 9002                     |
| Light source          | LED 6500 K | Protection type   | IP65                               |
| Color Rendering Index | CRI > 70   | Protection class  | I                                  |
| Control gear          | DALI D4i   | Impact resistance | IK08                               |
|                       |            | Dimensions        | $\varnothing$ 200 mm, width 423 mm |
|                       |            | Weight            | 6,50 kg                            |