



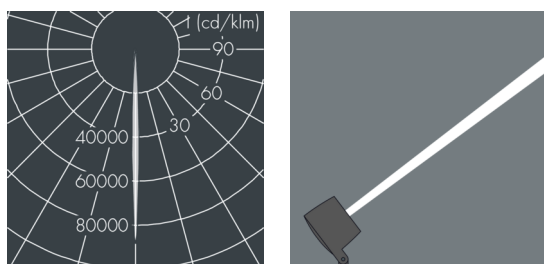

## MonoFlood 4

8 204 259 009

97 W, 2670 lm, RGBW (3000 K) warm white, DMX, extreme narrow beam 4°

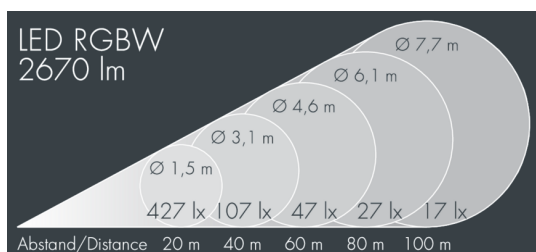

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 6 pole, precise PMMA optics, integral driver (AC/DC), Beam angle (FWHM): 4°, luminous flux: 2670 lm, wattage: 97 W, delivered lumens 28 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,046 m<sup>2</sup>, dimensions (L×H×W): 250 × 176 × 250 mm, weight 6.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

## Specification

|                            |                      |                             |                     |
|----------------------------|----------------------|-----------------------------|---------------------|
| Wattage                    | 97 W                 | Beam angle (FWHM)           | 4°                  |
| Delivered lumens           | 28 lm/W              | Housing colour              | silver grey         |
| Light source               | LED RGBW (3000 K)    | Power supply cable          | Ø 6 - 13 mm         |
| Control gear               | DMX                  | Protection type             | IP67                |
| Input voltage AC           | 120 - 250 V          | Protection class            | I                   |
| Input voltage DC           | 120 - 275 V          | Impact resistance           | IK08                |
| Voltage protection         | 3 kV L/N   4 kV L/PE | Windage area                | 0,046m <sup>2</sup> |
| Luminaires per B16A / C16A | 8 / 13               | Dimensions                  | 250 × 176 × 250 mm  |
|                            |                      | Weight                      | 6,90 kg             |
|                            |                      | Max. ambient temperature ta | 35°                 |