




Monospace

8 252 065 049

4 × 11,5 W, 5899 lm, 4000 K neutral white, asymmetrical beam 58°

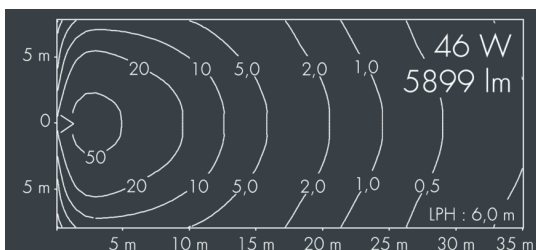

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, mounting bracket: 2 drilled holes \varnothing 7 mm, spacing 40 - 50 mm, 1 centre hole \varnothing 21 mm, tilt range: 180°, cable gland: M20, connecting terminal: 3 pole, highly efficient metallized PC reflector, integral control gear, CRI > 80, 3 SCDM, service life L80/B20 > 50.000 h, luminous flux: 5899 lm, wattage: 46 W, delivered lumens 128 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,063 m², dimensions (L×H×W): 362 × 67 × 308 mm, weight 4.5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP 67 IK 08

Specification

| | | | |
|----------------------------|----------------------|-----------------------------|-------------------------|
| Wattage | 46 W | Housing colour | white RAL 9002 |
| Delivered lumens | 128 lm/W | Power supply cable | \varnothing 5 - 14 mm |
| Light source | LED 4000 K | Protection type | IP67 |
| Color Rendering Index | CRI > 80 | Protection class | II |
| Colour tolerance | 3 SCDM | Impact resistance | IK08 |
| Lifetime ta 25° C | L80/B20 > 50.000 h | Windage area | 0,063m ² |
| Control gear | on / off | Dimensions | 362 × 67 × 308 mm |
| Input voltage AC | 220 - 240 V | Weight | 4,50 kg |
| Input voltage DC | 220 - 240 V | Max. ambient temperature ta | 35° |
| Voltage protection | 4 kV L/N 2 kV L/PE | | |
| Luminaires per B16A / C16A | 27 / 46 | | |