




Monospot Gobo

8 905 054 159

55 W, 1 240 lm, 6500 K cold white, DALI,
63 mm focal length 29°

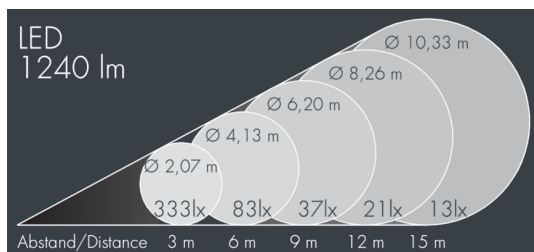

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, mounting bracket powder coated aluminum with tilt scale: 2 drilled holes Ø 7 mm, spacing 40 - 60 mm, 1 centre hole Ø 21 mm, tilt range: 180°, cable gland: M20, connecting terminal: 5 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (DALI), CRI > 70, Beam angle (FWHM): 29°, luminous flux: 1 240 lm, wattage: 55 W, delivered lumens 23 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,076 m², dimensions: Ø 240 mm, width 425 mm, weight 8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP65 IK08

Specification

| | | | |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage | 55 W | Beam angle (FWHM) | 29° |
| Delivered lumens | 23 lm/W | Housing colour | silver grey |
| Light source | LED 6500 K | Power supply cable | Ø 6 – 13 mm |
| Color Rendering Index | CRI > 70 | Protection type | IP65 |
| Control gear | DALI | Protection class | I |
| Input voltage AC | 220 – 240 V | Impact resistance | IK08 |
| Input voltage DC | 220 – 240 V | Windage area | 0,076m² |
| Voltage protection | 2 kV L/N 4 kV L/PE | Dimensions | Ø 240 mm, width 425 mm |
| Luminaires per B16A / C16A | 23 / 39 | Weight | 8,00 kg |
| | | Max. ambient temperature ta | 35° |