




## Monospot Gobo

8 905 264 169

55 W, 1724 lm, 6500 K cold white, DALI,  
45 mm focal length 41°

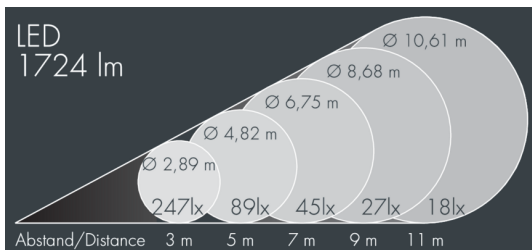

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles  $\varnothing$  60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes  $\varnothing$  9 mm, spacing 95 mm, 1 centre hole  $\varnothing$  13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (DALI), CRI > 70, Beam angle (FWHM): 41°, luminous flux: 1724 lm, wattage: 55 W, delivered lumens 31 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,076 m<sup>2</sup>, dimensions:  $\varnothing$  215 mm, width 390 mm, weight 8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

## Specification

Wattage	55 W	Beam angle (FWHM)	41°
Delivered lumens	31 lm/W	Housing colour	white RAL 9002
Light source	LED 6500 K	Power supply cable	$\varnothing$ 6 – 13 mm
Color Rendering Index	CRI > 70	Protection type	IP65
Control gear	DALI	Protection class	I
Input voltage AC	220 – 240 V	Impact resistance	IK08
Input voltage DC	220 – 240 V	Windage area	0,076m <sup>2</sup>
Voltage protection	2 kV L/N   4 kV L/PE	Dimensions	$\varnothing$ 215 mm, width 390 mm
Luminaires per B16A / C16A	23 / 39	Weight	8,00 kg
		Max. ambient temperature ta	35°