




## Monospot 1

8 901 046 079

6 W, 416 lm, 3000 K warm white,  
linear, rotatable 34° / 7°

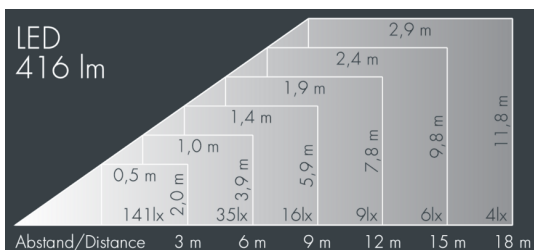

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 2 stainless steel screws, mounting bracket: 1 elongated hole  $\varnothing$  7 mm, spacing 18 mm, 1 centre hole  $\varnothing$  8.5 mm, tilt range: 180°, cable gland: M16, connecting terminal: 3 pole, highly efficient faceted rotationally symmetrical reflector, integral driver (AC), CRI > 80, max 3 SDCM, service life  $L_{90}/B_{10} > 50.000$  h, Beam angle (FWHM): 34° / 7°, luminous flux: 416 lm, wattage: 6 W, delivered lumens 69 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,017 m<sup>2</sup>, dimensions:  $\varnothing$  100 mm, width 113 mm, weight 1.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP67 IK08

## Specification

|                            |                            |                             |                                    |
|----------------------------|----------------------------|-----------------------------|------------------------------------|
| Wattage                    | 6 W                        | Beam angle (FWHM)           | 34° / 7°                           |
| Delivered lumens           | 69 lm/W                    | Housing colour              | black RAL 7021                     |
| Light source               | LED 3000 K                 | Power supply cable          | $\varnothing$ 5 – 9 mm             |
| Color Rendering Index      | CRI > 80                   | Protection type             | IP67                               |
| Colour tolerance           | max 3 SDCM                 | Protection class            | I                                  |
| Lifetime ta 25° C          | $L_{90}/B_{10} > 50.000$ h | Impact resistance           | IK08                               |
| Control gear               | on / off                   | Windage area                | 0,017m <sup>2</sup>                |
| Input voltage AC           | 100 – 240 V                | Dimensions                  | $\varnothing$ 100 mm, width 113 mm |
| Voltage protection         | 1 kV L/N   1 kV L/PE       | Weight                      | 1,10 kg                            |
| Luminaires per B16A / C16A | 154 / 154                  | Max. ambient temperature ta | 45°                                |