



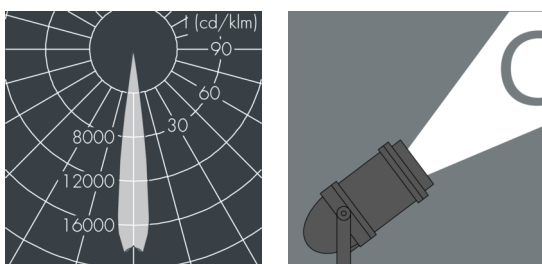

## Nightspot A Gobo Projector

8 975 065 019

19 W, 190 lm, 4000 K neutral white,  
85 mm focal length 14°

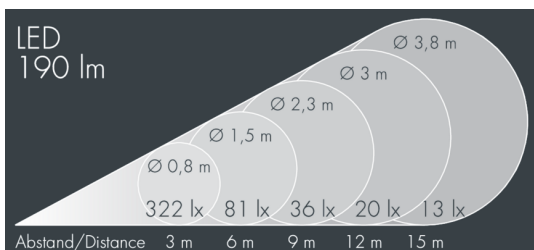

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, base can be turned through 360°, 2 drilled holes Ø 7 mm, spacing 77 x 93 mm, tilt range: 110°, cable gland: 7-10 mm, recessed or surface mounted cable, connecting terminal: 3 pole, focusable projection lens for precise light control and sharp-edged image projections, integral control gear, CRI > 80, max 2 SDCM, service life L80/B10 > 50.000 h, Beam angle (FWHM): 14°, luminous flux: 190 lm, wattage: 19 W, delivered lumens 9 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,037 m², dimensions: Ø 120 mm, width 340 mm, weight 2.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP65 IK08

## Specification

Wattage	19 W	Beam angle (FWHM)	14°
Delivered lumens	9 lm/W	Housing colour	white RAL 9002
Light source	LED 4000 K	Power supply cable	Ø 7 – 10 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L80/B10 > 50.000 h	Impact resistance	IK08
Control gear	on / off	Windage area	0,037m²
Input voltage AC	220 – 240 V	Dimensions	Ø 120 mm, width 340 mm
Input voltage DC	190 – 245 V	Weight	2,30 kg
Voltage protection	2 kV L/N   4 kV L/PE	Max. ambient temperature ta	35°