



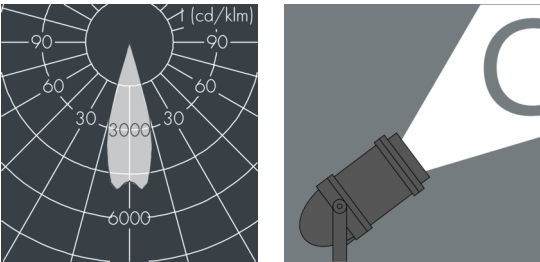

Nightspot B Gobo Projector

8 987 054 659  
55 W, 1 240 lm, 6500 K cold white, DALI,  
63 mm focal length 29°

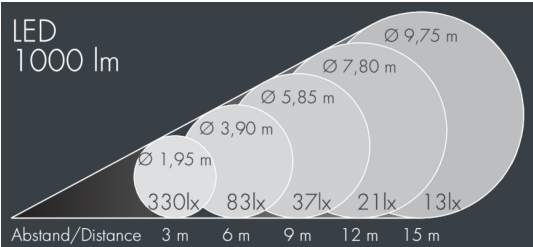

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 2 drilled holes Ø 9 mm, spacing 70 mm, 1 centre hole Ø 22 mm, tilt range: 105°, cable gland: M20, connecting terminal: 5 pole, focusable projection lens for precise light control and sharp-edged image projections, integral, dimmable driver (DALI), CRI > 70, service life L70/B > 50.000 h, Beam angle (FWHM): 29°, luminous flux: 1 240 lm, wattage: 55 W, delivered lumens 23 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,085 m², dimensions: Ø 240 mm, width 425 mm, weight 8.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

Specification

|                            |                      |                             |                        |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage                    | 55 W                 | Beam angle (FWHM)           | 29°                    |
| Delivered lumens           | 23 lm/W              | Housing colour              | silver grey            |
| Light source               | LED 6500 K           | Power supply cable          | Ø 8 – 15 mm            |
| Color Rendering Index      | CRI > 70             | Protection type             | IP67                   |
| Lifetime ta 25° C          | L70/B > 50.000 h     | Protection class            | II                     |
| Control gear               | DALI                 | Impact resistance           | IK08                   |
| Input voltage AC           | 220 – 240 V          | Windage area                | 0,085m²                |
| Input voltage DC           | 220 – 240 V          | Dimensions                  | Ø 240 mm, width 425 mm |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Weight                      | 8,10 kg                |
| Luminaires per B16A / C16A | 23 / 39              | Max. ambient temperature ta | 35°                    |