



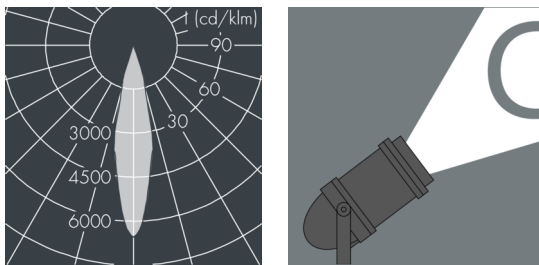

## Nightspot B Gobo Projector

8 987 056 059

55 W, 1 066 lm, 3 000 K warm white,  
63 mm focal length 29°

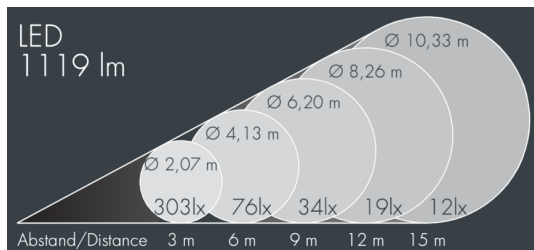

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 2 drilled holes Ø 9 mm, spacing 70 mm, 1 centre hole Ø 22 mm, tilt range: 105°, cable gland: M20, connecting terminal: 3 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (AC/DC), CRI > 80, Beam angle (FWHM): 29°, luminous flux: 1 066 lm, wattage: 55 W, delivered lumens 19 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,085 m<sup>2</sup>, dimensions: Ø 240 mm, width 425 mm, weight 8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

## Specification

|                            |                      |                             |                        |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage                    | 55 W                 | Beam angle (FWHM)           | 29°                    |
| Delivered lumens           | 19 lm/W              | Housing colour              | silver grey            |
| Light source               | LED 3000 K           | Power supply cable          | Ø 8 – 15 mm            |
| Color Rendering Index      | CRI > 80             | Protection type             | IP67                   |
| Control gear               | on / off             | Protection class            | I                      |
| Input voltage AC           | 220 – 240 V          | Impact resistance           | IK08                   |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Windage area                | 0,085m <sup>2</sup>    |
| Luminaires per B16A / C16A | 23 / 39              | Dimensions                  | Ø 240 mm, width 425 mm |
|                            |                      | Weight                      | 8,00 kg                |
|                            |                      | Max. ambient temperature ta | 35°                    |