
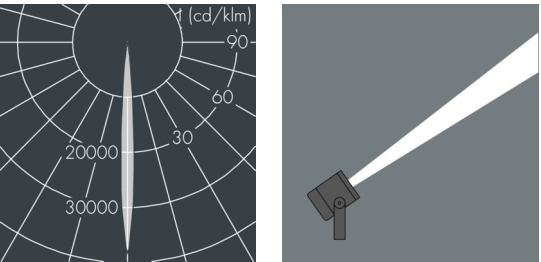


Superlight Compact Micro

8 813 055 719
5 × 2,5 W, 837 lm, 4000 K neutral white, DALI / 1-10V,
narrow beam 7°

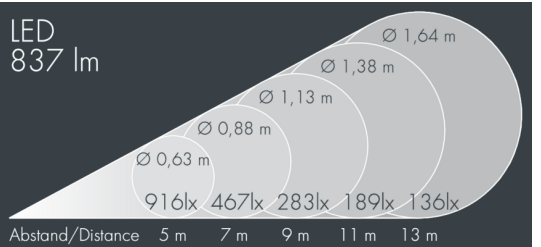

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 2 drilled holes Ø 8.5 mm, spacing 70 mm, 1 centre hole Ø 17 mm, tilt range: 120°, cable gland: 2 x M16, cable entry: 2, connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral driver (DALI / 1-10 V), CRI > 80, service life L90/B > 50.000 h, Beam angle (FWHM): 7°, luminous flux: 837 lm, wattage: 13 W, protection type IP67, protection class I, impact resistance IK08, windage area 0,11 m², dimensions (L×H×W): 86 × 126 × 123 mm, weight 1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

Specification

| | | | |
|-----------------------|------------------|-------------------|-------------------|
| Wattage | 13 W | Beam angle (FWHM) | 7° |
| Light source | LED 4000 K | Housing colour | silver grey |
| Color Rendering Index | CRI > 80 | Protection type | IP67 |
| Lifetime ta 25° C | L90/B > 50.000 h | Protection class | I |
| Control gear | DALI / 1-10V | Impact resistance | IK08 |
| | | Windage area | 0,11 m² |
| | | Dimensions | 86 × 126 × 123 mm |
| | | Weight | 1,00 kg |