
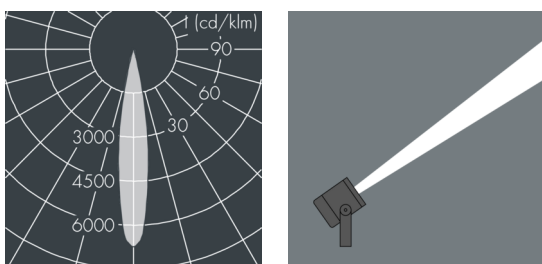


## Superlight Compact Micro

8 813 059 019  
4 × 3 W, 470 lm, RGB DMX,  
narrow beam 17°

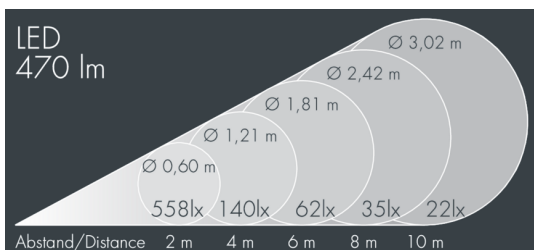

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 2 drilled holes  $\varnothing$  8.5 mm, spacing 70 mm, 1 centre hole  $\varnothing$  17 mm, tilt range: 120°, cable gland: 3 × M16, connecting terminal: 9 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral control gear, Beam angle (FWHM): 17°, luminous flux: 470 lm, wattage: 13 W, delivered lumens 36 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,11 m<sup>2</sup>, dimensions (L×H×W): 112 × 90 × 86 mm, weight 0.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

## Specification

Wattage	13 W	Beam angle (FWHM)	17°
Delivered lumens	36 lm/W	Housing colour	silver grey
Light source	LED RGB	Power supply cable	$\varnothing$ 5 – 9 mm
Control gear	DMX	Protection type	IP67
		Protection class	I
		Impact resistance	IK08
		Windage area	0,11 m <sup>2</sup>
		Dimensions	112 × 90 × 86 mm
		Weight	0,70 kg
		Max. ambient temperature ta	45°