
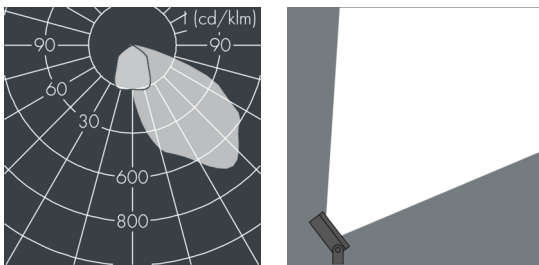


## Superlight LED 1

8 885 265 149

26 W, 2677 lm, 4000 K neutral white, DALI, asymmetrical 40°

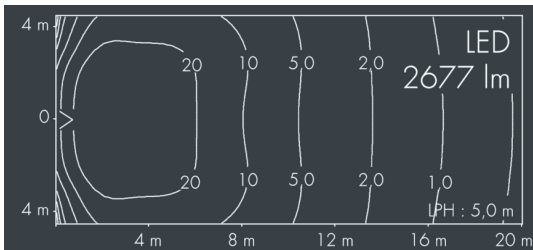

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, for installation on poles  $\varnothing$  60-100mm, adjustable aluminum mounting base, powder coated: 2 drilled holes  $\varnothing$  9mm, spacing 75mm, 1 centre hole  $\varnothing$  17mm, tilt range: 205°, cable gland: M20, connecting terminal: 5 pole, highly efficient reflector, integral driver (DALI), CRI > 85, 2 SCDM, service life L90/B10 > 50.000 h, luminous flux: 2677 lm, wattage: 26 W, delivered lumens 103 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,035 m<sup>2</sup>, dimensions (L×H×W): 184 × 70 × 184 mm, weight 2.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



## Specification

Wattage	26 W	Housing colour	white RAL 9002
Delivered lumens	103 lm/W	Power supply cable	$\varnothing$ 6 – 13 mm
Light source	LED 4000 K	Protection type	IP67
Color Rendering Index	CRI > 85	Protection class	I
Colour tolerance	2 SCDM	Impact resistance	IK08
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,035m <sup>2</sup>
Control gear	DALI	Dimensions	184 × 70 × 184 mm
Input voltage AC	220 – 240 V	Weight	2,80 kg
Input voltage DC	176 – 250 V	Max. ambient temperature ta	45°
Voltage protection	2 kV L/N   4 kV L/PE		
Luminaires per B16A / C16A	50 / 85		