





Ecoline Mini

8 766 146 289

9 × 1,8 W, 828 lm, 3000 K warm white, 1-10V, asymmetrical 30°

L₁ = 962 mm, L₂ = 925 mm

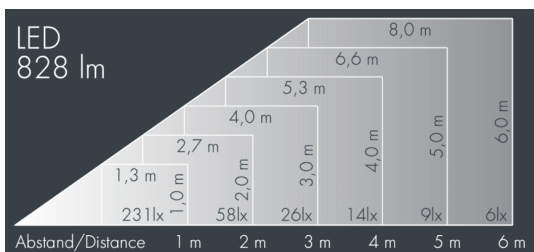

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, polycarbonate cover, with partial frosting for uniform light diffraction, silicon gasket, mounting flanges: 2 elongated holes Ø 6.5, spacing L₂, tilt range: 220°, cable gland:

M16, with 1 m cable gland ÖLFLEX Robust 210 5G1, connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral driver (dimnable 1-10V), CRI > 80, max 2 SDCM, service life L₉₀/B₁₀ > 50.000 h, luminous flux: 828 lm, wattage: 16 W, delivered lumens 52 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,037 m², dimensions (L×H×W): 962 × 43 × 40 mm, weight 2.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK10

Specification

Wattage	16 W	Housing colour	black RAL 7021
Delivered lumens	52 lm/W	Power supply cable	Ø 5 – 9 mm
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK10
Lifetime ta 25° C	L ₉₀ /B ₁₀ > 50.000 h	Windage area	0,037m ²
Control gear	1-10V	Dimensions	962 × 43 × 40 mm
Input voltage AC	220 – 240 V	Weight	2,10 kg
Input voltage DC	195 – 240 V	Max. ambient temperature ta	50°
Voltage protection	2 kV L/N 4 kV L/PE		
Luminaires per B16A / C16A	50 / 85		