




## Ecoline

8 792 355 059

15 × 2,5 W, 2840 lm, 4000 K neutral white,  
wide beam 67°

L<sub>1</sub> = 1562 mm, L<sub>2</sub> = 1515 mm

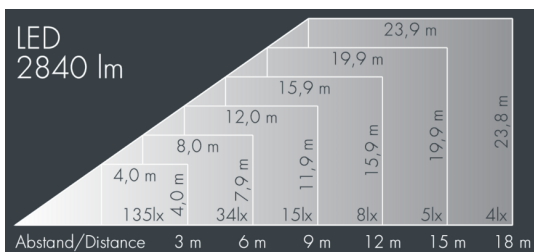

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, UV stabilised, impact-resistant polycarbonate cover with partial frosting for uniform light diffraction, silicon gasket, closure with 2 stainless steel screws, mounting flanges: 2 drilled holes Ø 6.5 mm, spacing L<sub>2</sub>, tilt range: 220°, cable gland: M20, connecting terminal: 3 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, CRI > 80, max 2 SDCM, service life L<sub>90</sub>/B<sub>10</sub> > 50.000 h, Beam angle (FWHM): 67°, luminous flux: 2840 lm, wattage: 38 W, delivered lumens 76 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,1 m<sup>2</sup>, dimensions (L×H×W): 1562 × 57 × 54 mm, weight 3.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



## Specification

Wattage	38 W	Beam angle (FWHM)	67°
Delivered lumens	76 lm/W	Housing colour	silver grey
Light source	LED 4000 K	Power supply cable	Ø 6 – 10 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L <sub>90</sub> /B <sub>10</sub> > 50.000 h	Impact resistance	IK10
Control gear	on / off	Windage area	0,1 m <sup>2</sup>
Input voltage AC	198 – 264 V	Dimensions	1562 × 57 × 54 mm
Input voltage DC	176 – 280 V	Weight	3,60 kg
Voltage protection	4 kV L/N   4 kV L/PE	Max. ambient temperature ta	40°