




## Minispot 1 - 48 V

8 924 066 029

2 W, 142 lm, 3000 K warm white,  
linear vertical 52° / 7°

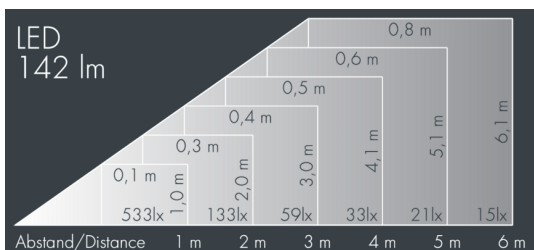

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, silicon gasket, with 2 stainless steel screws, mounting bracket: 1 long hole  $\varnothing$  7 mm, spacing 12 mm, 1 center hole  $\varnothing$  8.5 mm, tilt range: 185°, cable gland: M16, connecting terminal: 3 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, Constant current control (48 V DC), CRI > 80, 3, service life L90/B10 > 50.000 h, Beam angle (FWHM): 52° / 7°, luminous flux: 142 lm, wattage: 2 W, delivered lumens 71 lm/W, protection type IP65, protection class III, impact resistance IK08, windage area 0,006 m<sup>2</sup>, dimensions:  $\varnothing$  58 mm, width 92 mm, weight 0.5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

## Specification

Wattage	2 W	Beam angle (FWHM)	52° / 7°
Delivered lumens	71 lm/W	Housing colour	white RAL 9002
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	III
Colour tolerance	3	Impact resistance	IK08
Lifetime to 25° C	L90/B10 > 50.000 h	Windage area	0,006m <sup>2</sup>
Control gear	on / off	Dimensions	$\varnothing$ 58 mm, width 92 mm
Input voltage DC	24 – 48 V	Weight	0,50 kg
		Max. ambient temperature to	40°