
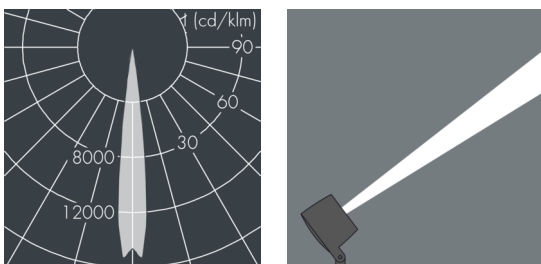


Monoflood 4

8 204 069 019

110 W, 3481 lm, RGBW (3000 K) warm white, DMX, narrow beam 13°

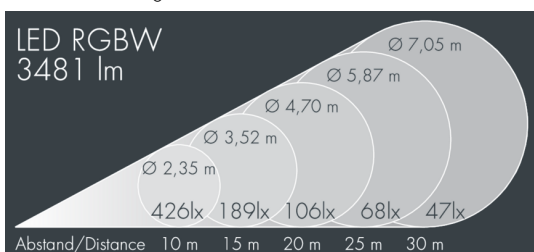

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, mounting bracket: 2 drilled holes Ø 7 mm, spacing 40 - 60 mm, 1 centre hole Ø 21 mm, tilt range: 180°, cable gland: M20, connecting terminal: 6 pole, precise PMMA optics, integral driver (AC/DC), service life L80/B20 > 50.000 h, Beam angle (FWHM): 13°, luminous flux: 3481 lm, wattage: 110 W, delivered lumens 32 lm/W, protection type IP67, protection class I, impact resistance IK10, windage area 0,046 m², dimensions (L×H×W): 250 × 176 × 250 mm, weight 6.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



Specification

| | | | |
|----------------------------|----------------------|-----------------------------|--------------------|
| Wattage | 110 W | Beam angle (FWHM) | 13° |
| Delivered lumens | 32 lm/W | Housing colour | white RAL 9002 |
| Light source | LED RGBW (3000 K) | Protection type | IP67 |
| Lifetime ta 25° C | L80/B20 > 50.000 h | Protection class | I |
| Control gear | DMX | Impact resistance | IK10 |
| Input voltage AC | 134 - 250 V | Windage area | 0,046m² |
| Input voltage DC | 135 - 250 V | Dimensions | 250 × 176 × 250 mm |
| Voltage protection | 3 kV L/N 4 kV L/PE | Weight | 6,90 kg |
| Luminaires per B16A / C16A | 8 / 13 | Max. ambient temperature ta | 35° |