




## Monospace High Output

8 251 446 149

8 × 20 W, 18082 lm, 3000 K warm white, DALI, asymmetrical beam 58°

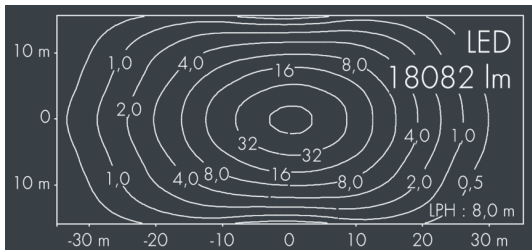

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, with pole top fitter for 2 luminaires for poles Ø 60/76 mm, 3 M8 grub screws, tilt range: 7°, cable gland: M20, with 2x 8 m cable Ho5RN-F5G1, connecting terminal: 5 pole, highly efficient metallized PC reflector, integral driver (DALI), CRI > 80, 3 SCDM, service life L80/B20 > 50.000 h, luminous flux: 18082 lm, wattage: 160 W, delivered lumens 113 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,063 m<sup>2</sup>, dimensions (L×H×W): 924 × 67 × 308 mm, weight 10.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

## Specification

|                            |                       |                             |                     |
|----------------------------|-----------------------|-----------------------------|---------------------|
| Wattage                    | 160 W                 | Housing colour              | black RAL 7021      |
| Delivered lumens           | 113 lm/W              | Protection type             | IP67                |
| Light source               | LED 3000 K            | Protection class            | I                   |
| Color Rendering Index      | CRI > 80              | Impact resistance           | IK08                |
| Colour tolerance           | 3 SCDM                | Windage area                | 0,063m <sup>2</sup> |
| Lifetime ta 25° C          | L80/B20 > 50.000 h    | Dimensions                  | 924 × 67 × 308 mm   |
| Control gear               | DALI                  | Weight                      | 10,30 kg            |
| Input voltage AC           | 230                   | Max. ambient temperature ta | 35°                 |
| Input voltage DC           | 190 – 250 V           |                             |                     |
| Voltage protection         | 6 kV L/N   10 kV L/PE |                             |                     |
| Luminaires per B16A / C16A | 11 / 19               |                             |                     |