
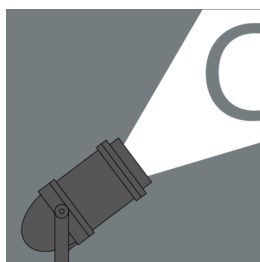
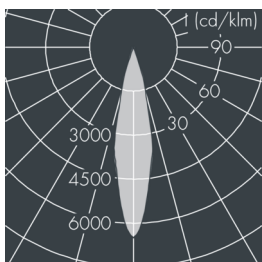


## Monospot Gobo

8 905 054 259

55 W, 1 240 lm, 6 500 K cold white, 1-10 V,  
63 mm focal length 29°

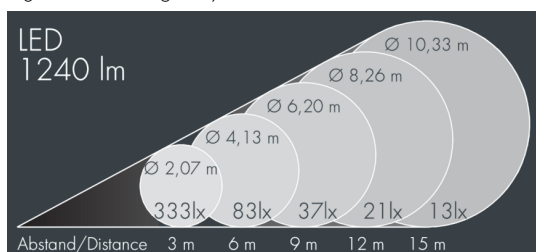

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, mounting bracket powder coated aluminum with tilt scale: 2 drilled holes Ø 7 mm, spacing 40 - 60 mm, 1 centre hole Ø 21 mm, tilt range: 180°, cable gland: M20, connecting terminal: 5 pole, focusable projection lens for precise light control and sharp-edged image projections, integral 1-10 V driver, CRI > 70, Beam angle (FWHM): 29°, luminous flux: 1 240 lm, wattage: 55 W, delivered lumens 23 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,076 m<sup>2</sup>, dimensions: Ø 240 mm, width 425 mm, weight 8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

## Specification

Wattage	55 W	Beam angle (FWHM)	29°
Delivered lumens	23 lm/W	Housing colour	silver grey
Light source	LED 6500 K	Power supply cable	Ø 6 – 13 mm
Color Rendering Index	CRI > 70	Protection type	IP65
Control gear	1-10 V	Protection class	I
		Impact resistance	IK08
		Windage area	0,076m <sup>2</sup>
		Dimensions	Ø 240 mm, width 425 mm
		Weight	8,00 kg
		Max. ambient temperature ta	35°