
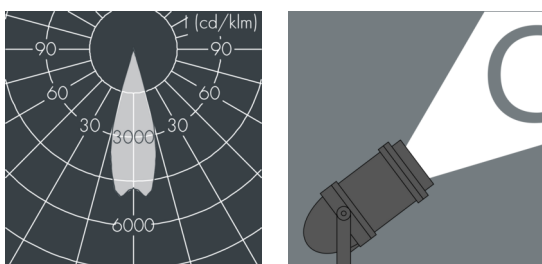


Nightspot B Gobo Projector

8 987 264 659

55 W, 1 240 lm, 6500 K cold white, DALI,
63 mm focal length 29°

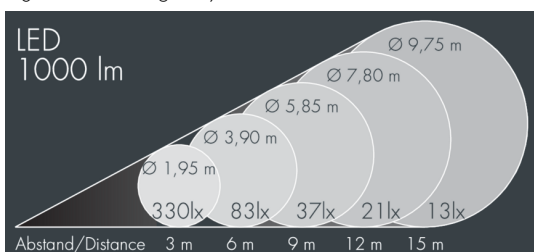

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, for installation on poles $\varnothing 60$ -100mm, adjustable aluminum mounting base, powder coated: 2 drilled holes $\varnothing 9$ mm, tilt range: 80°, cable gland: M20, connecting terminal: 5 pole, tilt range: 180°, focusable projection lens for precise light control and sharp-edged image projections, integral, dimmable driver (DALI), CRI > 70, Beam angle (FWHM): 29°, luminous flux: 1 240 lm, wattage: 55 W, delivered lumens 23 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,085 m², dimensions: $\varnothing 240$ mm, width 425 mm, weight 7.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

Specification

Wattage	55 W	Beam angle (FWHM)	29°
Delivered lumens	23 lm/W	Housing colour	white RAL 9002
Light source	LED 6500 K	Power supply cable	$\varnothing 6 - 10$ mm
Color Rendering Index	CRI > 70	Protection type	IP67
Control gear	DALI	Protection class	II
Input voltage AC	220 – 240 V	Impact resistance	IK08
Input voltage DC	220 – 240 V	Windage area	0,085m ²
Voltage protection	2 kV L/N 4 kV L/PE	Dimensions	$\varnothing 240$ mm, width 425 mm
Luminaires per B16A / C16A	23 / 39	Weight	7,90 kg
		Max. ambient temperature ta	35°