
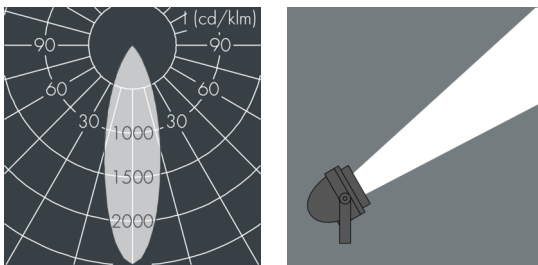


## Nightspot B

8 986 149 049

7 × 1,5 W, 926 lm, RGBW (4000 K) neutral white, DMX, medium wide beam 30°

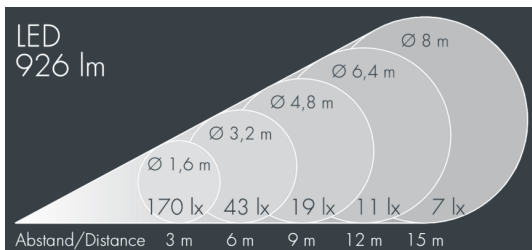

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting base adjustable: 2 drilled holes  $\varnothing$  9 mm, spacing 105 mm, 1 centre hole  $\varnothing$  22 mm, tilt range:  $125^\circ$ , cable gland: M20, connecting terminal: 6 pole, highly efficient optics with light conductor technology for precise lighting tasks and colour mixing within the luminaire, integral driver (AC/DC), service life L70/B20 > 50.000 h, Beam angle (FWHM):  $30^\circ$ , luminous flux: 926 lm, wattage: 42 W, delivered lumens 22 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,05 m<sup>2</sup>, dimensions:  $\varnothing$  240 mm, width 260 mm, weight 5.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

## Specification

Wattage	42 W	Beam angle (FWHM)	$30^\circ$
Delivered lumens	22 lm/W	Housing colour	black RAL 7021
Light source	LED RGBW (4000 K)	Power supply cable	$\varnothing$ 6 – 10 mm
Lifetime to 25° C	L70/B20 > 50.000 h	Protection type	IP67
Control gear	DMX	Protection class	I
Input voltage AC	120 – 250 V	Impact resistance	IK08
Input voltage DC	120 – 250 V	Windage area	0,05m <sup>2</sup>
Voltage protection	1 kV L/N   2 kV L/PE	Dimensions	$\varnothing$ 240 mm, width 260 mm
		Weight	5,90 kg
		Max. ambient temperature to	$45^\circ$