



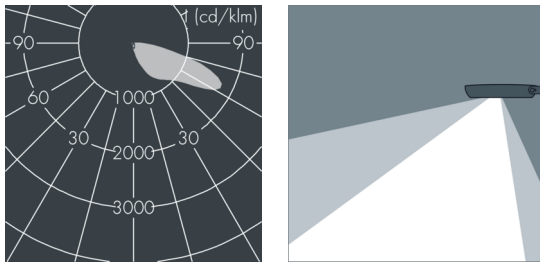

Metaspace High Output

8 218 346 349

6 × 10,8 W, 6072 lm, 3000 K warm white, Zhaga 18 - up,
asymmetrical beam 63°

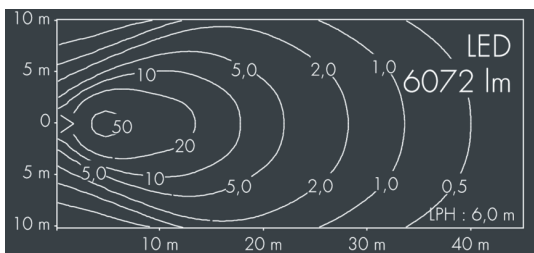

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles \varnothing 60/76 mm, fastening with 4 set screws M8, cable gland: M20, with 8 m cable HO7RN-F3G1, connecting terminal: 3 pole, highly efficient metallized PC reflector, integral driver (AC/DC), CRI > 80, 3, service life L80/B20 > 50.000 h, luminous flux: 6072 lm, wattage: 65 W, delivered lumens 93 lm/W, protection type IP65, protection class II, impact resistance IK08, windage area 0,056 m², dimensions (L×H×W): 376 × 112 × 15 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

| | | | |
|----------------------------|-----------------------|-----------------------------|---------------------|
| Wattage | 65 W | Housing colour | black RAL 7021 |
| Delivered lumens | 93 lm/W | Protection type | IP65 |
| Light source | LED 3000 K | Protection class | II |
| Color Rendering Index | CRI > 80 | Impact resistance | IK08 |
| Colour tolerance | 3 | Windage area | 0,056m ² |
| Lifetime ta 25° C | L80/B20 > 50.000 h | Dimensions | 376 × 112 × 15 mm |
| Control gear | Zhaga 18 - oben | Weight | 5,10 kg |
| Input voltage AC | 220 – 240 V | Max. ambient temperature ta | 40° |
| Input voltage DC | 220 – 240 V | | |
| Voltage protection | 6 kV L/N 10 kV L/PE | | |
| Luminaires per B16A / C16A | 10 / 16 | | |