






## Monospot Gobo

8 905 246 019

55 W, 1 544 lm, 3000 K warm white,  
150 mm focal length 14°

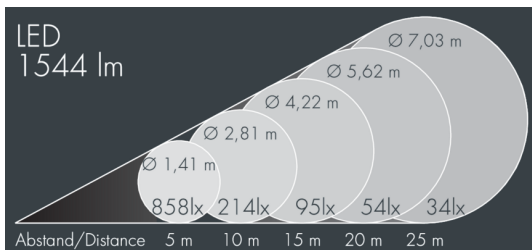

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles  $\varnothing$  60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes  $\varnothing$  9 mm, spacing 95 mm, 1 centre hole  $\varnothing$  13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 3 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (AC/DC), 80, Beam angle (FWHM): 14°, luminous flux: 1 544 lm, wattage: 55 W, delivered lumens 28 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,076 m<sup>2</sup>, dimensions:  $\varnothing$  215 mm, width 390 mm, weight 8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

## Specification

Wattage	55 W	Beam angle (FWHM)	14°
Delivered lumens	28 lm/W	Housing colour	black RAL 7021
Light source	LED 3000 K	Power supply cable	$\varnothing$ 6 – 13 mm
Color Rendering Index	80	Protection type	IP65
Control gear	on / off	Protection class	I
Input voltage AC	220 – 240 V	Impact resistance	IK08
Voltage protection	2 kV L/N   4 kV L/PE	Windage area	0,076m <sup>2</sup>
Luminaires per B16A / C16A	23 / 39	Dimensions	$\varnothing$ 215 mm, width 390 mm
		Weight	8,00 kg
		Max. ambient temperature ta	35°