

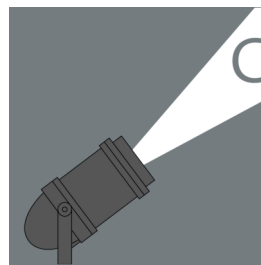


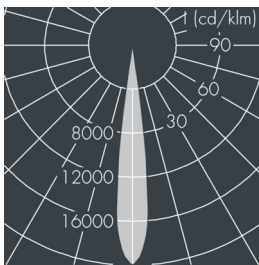

## Monospot Gobo

8 905 264 019

55 W, 1795 lm, 6500 K cold white,  
150 mm focal length 14°

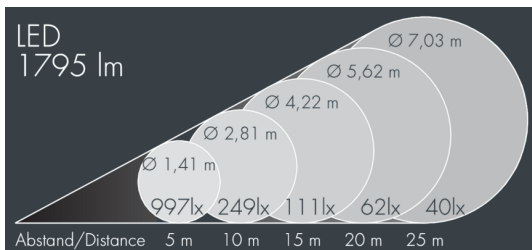

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 3 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (AC/DC), 70, Beam angle (FWHM): 14°, luminous flux: 1795 lm, wattage: 55 W, delivered lumens 33 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,076 m<sup>2</sup>, dimensions: Ø 215 mm, width 390 mm, weight 8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

## Specification

Wattage	55 W	Beam angle (FWHM)	14°
Delivered lumens	33 lm/W	Housing colour	white RAL 9002
Light source	LED 6500 K	Power supply cable	Ø 6 – 13 mm
Color Rendering Index	70	Protection type	IP65
Control gear	on / off	Protection class	I
Input voltage AC	220 – 240 V	Impact resistance	IK08
Voltage protection	2 kV L/N   4 kV L/PE	Windage area	0,076m <sup>2</sup>
Luminaires per B16A / C16A	23 / 39	Dimensions	Ø 215 mm, width 390 mm
		Weight	8,00 kg
		Max. ambient temperature ta	35°