



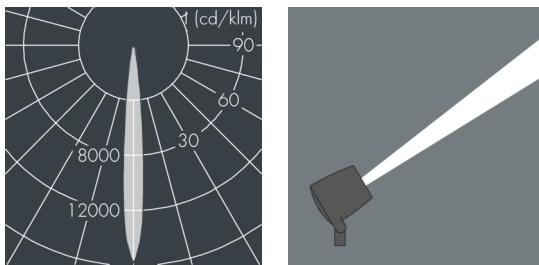

## Monospot 4

8 904 262 119

45 W, 2748 lm, 2700 K – 6500 K tunable white DALI, narrow beam 10°

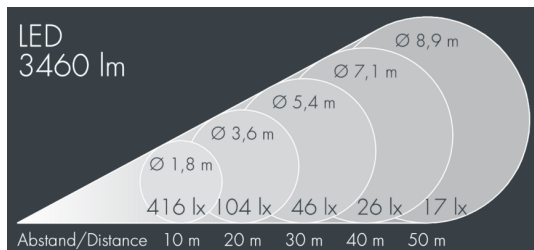

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, Colour: white RAL 9002, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles  $\varnothing 60 - 100$  mm, tiltable base made of powder coated aluminum, 2 drilled holes  $\varnothing 9$  mm, spacing 95 mm, 1 centre hole  $\varnothing 13.5$  mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, highly efficient faceted rotationally symmetrical reflector, integral, dimmable driver (DALI), CRI > 80 / >70, 3 SCDM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 10°, luminous flux: 2748 lm, wattage: 45 W, delivered lumens 61 – 75 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,075 m<sup>2</sup>, dimensions:  $\varnothing 215$  mm, width 240 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

## Specification

Wattage	45 W	Beam angle (FWHM)	10°
Delivered lumens	61 – 75 lm/W	Housing colour	white RAL 9002
Light source	LED 2700 K – 6500 K	Power supply cable	$\varnothing 6 - 13$ mm
Color Rendering Index	CRI > 80 / >70	Protection type	IP67
Colour tolerance	3 SCDM	Protection class	I
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK08
Control gear	DALI	Windage area	0,075m <sup>2</sup>
		Dimensions	$\varnothing 215$ mm, width 240 mm
		Weight	5,10 kg
		Max. ambient temperature ta	35°